Applicaition


The Uni-P Pro 120X dehumidifier is able to extract 120 pints of water at a standard rating condition of 80°F/60%RH in a space, not more than 3,300 sq.ft.


This unit will only use up 8.3amps/115V while controlling the humidity levels. it is built with high capacity, high energy use efficiency and is environmentally friendly.


The Uni-P Pro 120X dehumidifier is built for use in a mid-size commercial set up, however since it is built small and compact.


this unit can be easily moved into any space that requires dehumidification using already fitted heavy duty carrier handles.

This design also allows the unit to easily hang overhead. The Uni-P Pro 120X dehumidifier is one of most purchased commercial space dehumidifiers for its quiet operation abilities. This unit will produce sounds below 60DBA, hence your workplace will remain comfortable for you, your employees and most importantly your customers.

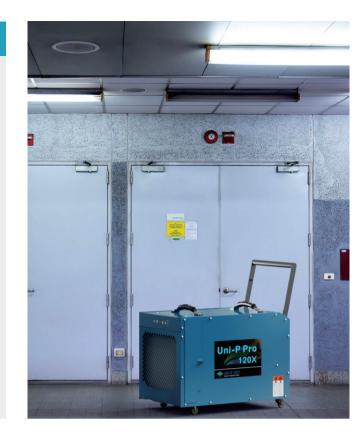

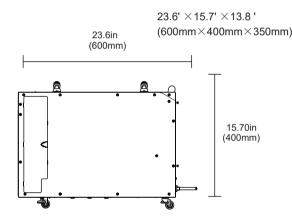





Performance

• Air filtration - The Uni-P Pro 120X dehumidifier is fitted with MERV - 8 filters that are able to trap even the smallest mold spores, dust particles and any other allergens in the air. The Uni-P Pro 120X dehumidifier will improve the quality of your indoor air hence reducing the number of respiratory problems and allergies in your employees.

Note: to achieve the desired dehumidification results with The Uni-P Pro 120X dehumidifier, space must be free of water intrusion or excessive fresh outdoor air infiltration. All water intrusion and air infiltration problems should be fixed before installation.

Get the Uni-P Pro 120X dehumidifier today and experience the change!




UNI-P Pro 120X Commmercial Dehumidifier








MERV-1 filter MERV-10 filter



Rare earth alloy tube evaporator



Microchannel coldan heat exchanger



Condensate Pump

Features

✓ CETL

√ Compressor Type Rotary

√ More Thorough, And More Quick

√ Ducting options √ Condensate Pump

√ Easy handling

√ Water Full protection

V Environmental R410A Refrigerant Automatic humidistat control

✓ Memory Starting

√ Washable Air Filter

√

V

√ Low Temperature

√ √ Quick connection to Cable/Hose

Cable / Hose Wrap

Specifications

Power

115V/60HZ

Size For Up to 3300Sq.FT

MERV-1-Filter / MERV-10 Filter

Compressor type

Rotaly

Sound Pressure Level

<60DBA

Refrigerant R410a

Display type

Digital Draining

Condensate Pump

CFM(air flow) 290 CFM

Current Draw

7.8 Amps

Capacity115V(80°F-60%)

120Pints

Wheel

Portable Wheel

COP(115v/60Hz)

2.7L/Kwh(115v/60Hz),3.0L/Kwh(220v/50Hz)

Power Cord

110-120 VAC, Ground

Weight 88lbs

Dim(D*H*W) 23.8' ×14.7' ×17.9

 $(605 \text{mm} \times 375 \text{mm} \times 455 \text{mm})$

Loading quantity

20":132Sets/40":292Sets/40"HQ:365Sets

Ideal Functioning Humidity Range 36~90%

Functioning Temperature Range 33.8°F Min - 104°F Max